Policy Newsletter December 2023

Rosemary Roberts



Bringing energy to your door



Stay connected...











www.enwl.co.uk

Policy Updates – Major Policy Updates



Ref	Issue	Title	Suggested Audience	Policy Dissemination Method
CP420 Pt1	Prelims I22 Chapter 22 I4	Policy and Practice for Wood Pole Overhead Lines	Linesmen & LL RGW Teams, Design/Delivery Engineers & Managers, Academy.	Team Brief
CP306	FM6_021 - I2 FM9_004 - I2	Fitting Manual	All operational staff, control engineers, and delivery managers.	Team Brief
ES400 L5	6	Two —way and Four-way Underground Link Boxes.	Procurement and Academy.	Team Brief

Policy Updates – Minor Policy Updates



Ref	Issue	Title	Suggested Audience	Policy Dissemination Method
CP411 Pt 1N	Section 2 – I12 Standard Technique 13-4 – I3	LV Cable Jointing Code of Practice	Academy and Delivery Managers.	Team Brief
CP421-5	13	Maintenance and Refurbishment of Overhead Lines – HV Mains Supported by Poles	Linesmen, Design/Delivery Engineers & Managers, Academy.	Team Brief
CP423	Various per chapter	Linesmen's Manual – Live Line Working	Live Line RGW Linesmen, Design/Delivery Engineers & Managers, Academy.	Team Brief


Major Policy Updates





CP420 Pt1 - Policy and Practice for Wood Pole Overhead Lines



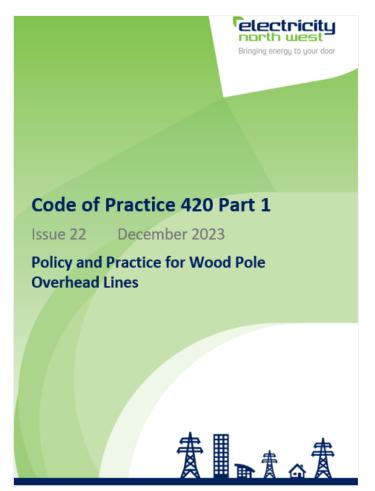

- Major review Methods of Live Line pole erection updated in section 9.1.
- Team numbers clarified in section 11.3.
- Routine inspections updated in section 11.5.4.
- Safe working distance removed and reference to CP423 added for consistency in section 11.11.

Documents referenced updated in section 13.

CP306 – Fitting Manual



CP306 FM6_021 – Pole Mounted, SF₆ Filled, Auto Reclosers

 This document has been updated and raised to a new issue in order to provide necessary clarifications for gas testing and actions required.

CP306 FM9_004 – Installation and Commissioning of RX10 App Based Actuators

 This document has been updated and raised to a new issue in order to provide necessary instructions and procedures for installing and commissioning the Reflex actuators on to additional ring main unit types of Lucy FRMU and VRN/VRN2.



ES400 L5 – Two-way and Four-way Underground Link Boxes



Update of Specification to Issue 6

We will go out to competitive tender for LV link boxes shortly, and the update to this specification is to ensure tenderers provide compliant bids to meet our requirements.

- 1. Options added for a link box design allowing direct connection under live conditions of modern and legacy cable designs. This is following the use of the Prysmian link boxes for the ReLink innovation trial where existing PILC and waveform cables were directly connected live into the new boxes without the use of short tails and intermediate joints. This feature could create potential savings in cost/time on installations by reducing joint bay size and need for extra joints.
- 2. Option added for higher rating 25Tonne access cover for areas where occasional vehicle traffic may be encountered.
- 3. Options to provide lightweight lockable composite access covers as alternative to cast iron versions.
- 4. Preference for link boxes with future compatibility for electronic switch devices
- 5. Various minor amendments to shell thickness, waveform size range and test methods.





Minor Policy Updates





Minor Policy Updates



CP411 Pt1N – LV Cable Jointing Code of Practice

Update to Standard Technique 13.4

- To correct the fuse rating information for the remote cut out in a bus barred installation (from 80A to 60A)
 *Note information was correct in the "old" LV cable jointing CP411Pt1, but there was an error in the "newer" version CP411Pt1N
- 2. Information on the Lucy House service cut outs has been removed as these are no longer used/approved.

CP421-5 - Maintenance and Refurbishment of Overhead lines - HV Mains Supported by Poles

 Requirement added in section 4.1 for all insulators to be replaced, in line with common practice, at the pole top for failed insulator resulting pole leakage current and electrical shock.

CP423 - Linemen's Manual – Live Line Working

 LL Technique 024 has been reviewed and updated with additional wording added for contingency plans for site emergencies in section 5. Live Line Safety Audit sheet removed from section 8 and referenced to ES400A4 for the audit sheet.