Policy Newsletter November 2023

Peter Twomey



Bringing energy to your door



Stay connected...











www.enwl.co.uk

Policy updates – Major Policy Updates



Ref	Issue	Title	Suggested Audience	Policy Dissemination Method
CP420 Pt1 Ch19	Prelims I21 Ch19 I3	Policy and Practice for Wood Pole Overhead Lines	Tree Cutters, Linesmen, Design/Delivery Engineers & Managers, Academy	Team Brief
CP606 Section B B01	8	Operations Manual	All operational staff, control engineers and delivery managers.	Team Brief
CP606 Section G G18	10	Operations Manual	All operational staff, control engineers and delivery managers.	Team Brief
CP606 Section S S09, S14 and S44	S09 – I8 S14 – I7 S44 - I9	Operations Manual	All operational staff, control engineers and delivery managers.	Team Brief
ES400A4	2	Auditing of Live Line Working	Live Line RGW Linesmen, Design/Delivery Engineers & Managers, Academy	Team Brief

Policy updates – Minor Policy Updates



Ref	Issue	Title	Suggested Audience	Policy Dissemination Method
CP411Pt1N	Various per chapter	LV Cable Jointing Manual	Jointing Teams, Delivery Engineers & Managers, Training Academy	Team Brief
CP421-3	8	Maintenance and Refurbishment of Overhead Lines – LV Services and Murals	Design/Delivery Engineers & Managers, Training Academy	Team Brief


Major policy updates





CP420Pt1 Policy & Practice for Wood Pole Overhead lines



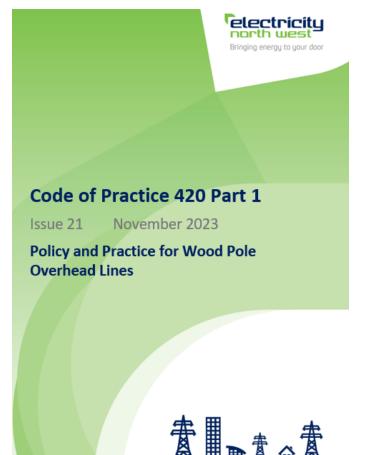

Ch 19 – Control of Vegetation adjacent to overhead lines.

Aligned with CP606 A10 covering live line work.

- Justification for live line work
- Criteria for justification
- Safety distances
- General requirements for work
- Categorisation of work

CP606 Operations Manual – Section B



B01 – Cable Indications

Updated to cover HV cables running at LV

D

CP606 Operations Manual – Section S



S09 – switchgear labels

minor cross reference error corrected

S14 – Earthing – Approved Equipment and Procedures

 clarification added for earthing requirements for transformers

S44 – Automatic switching by ARS and C2C

- complete procedure update for FLISR.
- Reference to C2C removed
- Requirement to disable FLISR for field control added

CP606 Operations Manual Section G






SYSTEM AMENDMENT PROCEDURE

Procedure G18

1 Scope/Application

This procedure covers the data submission requirements and amendment procedures for updating the Operational Systems used in ENWL.

2 Safety Information



3 Preliminary Operations

Refer to Section 1 of this manual.

NOTE: The meaning of all bold capitalized words used in the body text of this procedure are as set out in the Electricity North West - Distribution Safety Rules, 2013 edition, Section 2, Definitions'

4 General

Data Management are responsible for ensuring that work to connect, re-connect or disconnect apparatus from the Electricity Network recorded in an accurate and timely manner to ensure that our asset records are maintained in good condition to support the safe operation of the network and ongoing management of the both assets and the network as a whole, and that we can fulfil our obligations to maintain network records.

There is an absolute requirement for Engineers working on the system to provide accurate System Amendment data sheets at the times specified within the procedure, to enable the network model to accurately represent the operational network.

G18 System Amendment Procedure

- References to CHiME added
- Exceptions for the need to submit pre-laid info including temporary generation, Weezaps and Rezaps.
- Pre-laid information required where the amendment involves the commissioning of additional telemetry when the electrical equipment is commissioned (Including smart devices such as ReLink, Perch or Weezaps)

ES400 A4 Auditing HV Live Line Working



- Changes to risk assessment considerations
- Experience requirement for inspectors changed
- References to CP423 Live Line Technique updated



Minor policy updates





Minor policy updates



CP411 Pt1 LV Cable Jointing Manual

 All statements removed regarding leaving Denso Taped temporary joints on the network for no longer than 24hrs.

CP421-3 Maintenance and Refurbishment of Overhead Lines – LV Services and Murals

Removed CP420 Pt1 Chapter 23 throughout as this has been archived.