

# **Electricity Specification 400S6**

Issue 3 June 2022

Re-enterable Joint Shells for Temporary LV Joints



ES400S6

## **Amendment Summary**

ISSUE NO. DATE	DESCRIPTION	
Issue 2 December 2021	The new template for Engineering Specification Documents has been applied.  All information has been reviewed and updated where appropriate.	
	Prepared by: Approved by:	Philip Howell Policy Approval Panel and signed on its behalf by Steve Cox, Engineering and Technical Director
Issue 3	Removal of small and medium size shells due to becoming discontinued	
June 2022	Prepared by: Approved by:	Philip Howell Policy Approval Panel and signed on its behalf by Steve Cox, DSO Director



ES400S6

### **Contents**

1	Introduction			
2	Scope		4	
3	Defi	nitions	4	
4	Gen	General Requirements for Approvals and Testing		
	4.1	Product not to be Changed	5	
	4.2	Electricity North West Technical Approval	5	
	4.3	Quality Assurance	5	
	4.4	Formulation	6	
	4.5	Identification Markings	6	
	4.6	Minimum Life Expectancy	6	
	4.7	Product Conformity	6	
	4.8	Confirmation of Conformance	6	
5	Requ	Requirements for Type and Routine Testing		
	5.1	Requirement for Type Tests at Suppliers Premises	7	
	5.2	Requirement for Routine Tests at the Supplier's Premises	7	
6	Tech	nnical Particulars	7	
	6.1	Requirements	7	
	6.2	Mechanical Impact Resistance	8	
7	Doc	uments Referenced	10	
8	Keywords		10	
App	ppendix A – Scope of Materials			
Арр	ppendix B – Conformance Declaration 12			

### All Rights Reserved

The copyright of this document, which contains information of a proprietary nature, is vested in Electricity North West Limited. The contents of this document may not be used for purposes other than that for which it has been supplied and may not be reproduced, either wholly or in part, in any way whatsoever. It may not be used by, or its contents divulged to, any other person whatsoever without the prior written permission of Electricity North West Limited.

ES400S6

### 1 Introduction

This Specification covers the supply of re-enterable joint shells to be used for providing adequate mechanical and environmental protection for temporary LV joints installed on the electricity distribution network (Network) owned by Electricity North West Limited, as Distribution Licensee, herein referred to as Electricity North West

## 2 Scope

The Specification covers the requirements for three sizes of re-enterable chambers which can be locked closed around various cable joint combinations which may be needed to maintain electrical supply on the LV Network.

The shells are considered re-usable items rather than consumables.

## 3 Definitions

Approval	Sanction by the Electricity North West Circuits Policy Manager that specified criteria have been satisfied		
Contract	The agreement between Electricity North West and the Contractor for the execution of the Works including therein all documents to which reference may properly be made in order to ascertain the rights and obligations of the parties under the said agreement.		
Contractor	The person or person's firm or company, including personal representatives, successors and permitted assigns, who's Tender has been accepted by Electricity North West.		
Specification	The Specifications and schedules (if any) agreed by the parties for the purpose of the Contract.		
Supplier	Any person or person's firm or company who supplies goods to Electricity North West or to its Contractor.		
Tender	An offer in writing to execute work or supply goods at a fixed price.		
Tenderer	The person or person's firm or company, including personal representatives, successors and permitted assigns, invited by Electricity North West to submit a Tender.		

ES400S6

## 4 General Requirements for Approvals and Testing

### 4.1 Product not to be Changed

No change in the product, packaging or labelling shall be made after Approval has been granted without prior notice to the Electricity North West Circuits Policy Manager, and receipt of a written agreement to the proposed change from the Electricity North West Circuits Policy Manager.

### 4.2 Electricity North West Technical Approval

The Tenderer shall submit, with this Tender, proposals for testing which will demonstrate, to the satisfaction of the Electricity North West Circuits Policy Manager, compliance with this Specification. Such tests shall be carried out without expense to Electricity North West.

Alternatively, technical reports and other data may be submitted that the Tenderer considers will demonstrate, to the satisfaction of the Electricity North West Circuits Policy Manager, compliance with this Specification. Acceptance of this evidence shall be at the discretion of the Electricity North West Circuits Policy Manager but will not be unreasonably withheld.

Approval shall be 'factory specific' and is not transferable to another factory without the written Approval of the Electricity North West Circuits Policy Manager.

The Supplier and product shall comply with all the relevant requirements of Electricity North West document CP311.

## 4.3 Quality Assurance

The Tenderer shall confirm whether or not Approval is held in accordance with a quality assurance scheme accredited under ISO 9000. If not, the Tenderer shall submit a statement of the quality assurance procedures employed to control the quality of the product, including the performance of Suppliers and Sub-Contractors.

The right is reserved for the repeat of such tests, from time to time, that the Electricity North West Circuits Policy Manager may deem to be reasonably necessary to demonstrate continued compliance with the Specification.

The Tenderer shall submit, with the Tender, a list of tests and inspections which are carried out on the product prior to despatch which shall demonstrate, to the satisfaction of the Electricity North West Circuits Policy Manager, fitness for installation and service.

The Tenderer shall provide free of charge to Electricity North West such samples as may, in the opinion of the Electricity North West Circuits Policy Manager, be reasonably required for inspection and/or retention as quality control samples. The Electricity North West Circuits Policy Manager will confirm the requirement for samples at the time of Tendering.

The right is reserved for inspections to be made of Tenderer's facilities, from time to time, as deemed reasonably necessary by the Electricity North West Circuits Policy Manager to ensure compliance with this Specification and any Contract of which it forms a part.



ES400S6

The Tenderer shall submit, with the Tender, such details of product packaging disposal, as will enable Electricity North West to comply with the requirements of BS EN ISO 14001 - Environmental Management Systems.

#### 4.4 Formulation

The Tenderer shall submit, with the Tender, such details of the formulation and use of the product and associated substances as will enable Electricity North West to comply with the obligations of the Health and Safety at Work Act 1974 and the Control of Substances Hazardous to Health Regulations 2002, in the use, storage and disposal of the product. The Tenderer may stipulate, prior to submission of such information, that it is to remain confidential, and the Electricity North West Circuits Policy Manager will, if requested, confirm agreement to this prior to receipt of the information.

## 4.5 Identification Markings

The Tenderer shall submit, with the Tender, details of markings which it is proposed to apply to the product or packaging to identify manufacturing batches or items. The forms and content of such markings shall be subject to the Approval of the Electricity North West Circuits Policy Manager and shall in all cases include the Electricity North West approved description and commodity code number.

The Tenderer shall submit, with the Tender, such details of marking gross weight on components, assemblies and packages, as will enable Electricity North West to comply with the Health and Safety Manual Handling Operation Regulations 1992, for components, assemblies and packages supplied with a gross weight over 1kg. The forms and content of such markings shall be subject to the Approval of the Electricity North West Circuits Policy Manager.

### 4.6 Minimum Life Expectancy

The minimum life expectancy of all products covered by this Specification is 10 years. As part of the supply scope, the supplier should provide an inspection, servicing and repair operation to ensure the equipment's life expectancy is achieved and extended by ensuring the equipment is in a safe and reliable condition at all times.

### 4.7 **Product Conformity**

Preference will be given to those Suppliers who can provide suitable product conformity certification to a recognised or specified standard, or an equivalent certification.

#### 4.8 Confirmation of Conformance

The Tenderer shall complete the conformance declaration sheets in <u>Appendix B.</u> Failure to complete these declaration sheets may result in an unacceptable bid.

## 5 Requirements for Type and Routine Testing

The Electricity North West Circuits Policy Manager shall set out the requirement of the following tests to be carried out by the Supplier at the Supplier's cost.

FS400S6

### 5.1 Requirement for Type Tests at Suppliers Premises

These are a series of one-off type tests, which are carried out to ensure the satisfactory performance of the product design, under extremes of operating stresses, and of endurance, as may be appropriate, to be determined by the Electricity North West Circuits Policy Manager.

These may or may not be destructive tests.

## 5.2 Requirement for Routine Tests at the Supplier's Premises

These tests may be required to be carried out on every individual unit or component, as specified, or at some regular frequency to be determined by the Electricity North West Circuits Policy Manager.

The results of these tests may be required to be supplied to Electricity North West with each unit purchased or retained for inspection, at a period to be determined by the Electricity North West Circuits Policy Manager.

### 6 Technical Particulars

#### 6.1 Requirements

The shells should fulfil the following criteria;

- Time for application to be no more than 15 man minutes.
- Time to remove to be no more than 15 man minutes.
- To be light in weight such that it can be easily handled by one person
- To be able to be fitted around temporary LV joint such that the shell can be fully closed and secured shut by means of a catch arrangment and can be locked using a padlock.
- To be applicable to a wide range of configurations (e.g straight, branch or bottle end) and cable sizes without modification.
- Three sizes of shell (small, medim and large) will be required as shown in drawings within this
  document.
- To be able to contain a disruptive failure with a LV cable joint without significant external effects.
- To be non-combustible.
- To be externally marked "Danger Live Electric Cable" or "Live Electrical Apparatus" The marking to be permanent
- To be re-usable without repair once removed
- To be electrically insulating or if a metallic casing or screen is used, then adequate connection points for earthing to be provided




ES400S6

### **6.2** Mechanical Impact Resistance

The shells should provide a high level of mechanical protection and remain serviceable (although not necessarily without any damage) when subjected to impact tests as follows;

- Sample 1 A blow equivalent to the corner of a 900mm x 600mm concrete paving slab, dropped from a height of 1 metre.
- Sample 2 Six blows, equivalent to the point of a steel fencing pin aimed at random, dropped from a height of 2 metres



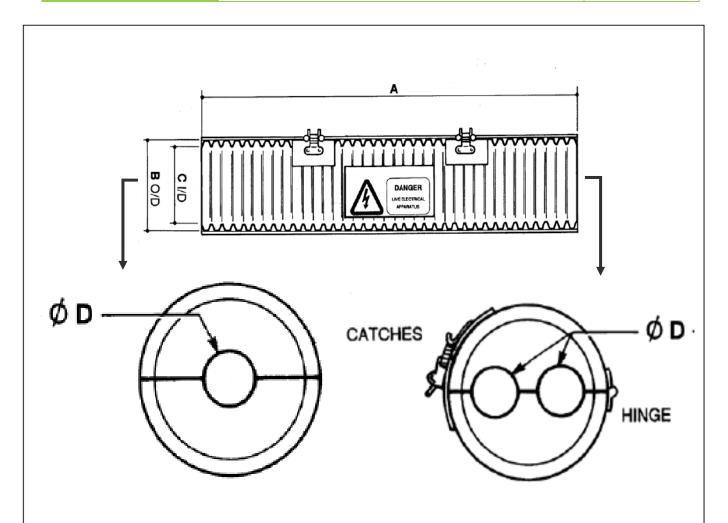

Shell Size	Length	Overall Diameter	Internal Diameter	Cable Exit diameter
	A (mm)	B (mm)	C (mm)	D (mm)
Large	1140	260	215	70

**Details of Re-enterable LV Temporary Joint Shell** 

**Telectricity** northwest

Drawn: PPH Approved: Drawing Number: ES400 S6 – D001 June 22

Scale: n.t.s

> Issue 3 June 2022

Page 9 of 13

ES400S6

## 7 Documents Referenced

All references to documents listed below are to the latest versions, unless stated otherwise

DOCUMENTS REFERENCED			
Health and Safety at Work Etc Act 1974.			
Control of Substances Hazardous to Health Regulations 2002.			
Manual Handling Operations Regulation 1992.			
BS EN ISO 9000	Quality management systems.		
BS EN ISO 14001: 2004	Environmental Management Systems.		
CP311	Approval Policy and Process		

## 8 Keywords

Temporary LV Joint Shell



ES400 S6

## **Appendix A – Scope of Materials**

The following equipment is currently approved for use on Electricity North West Network.

ITEM NO.		COMMODITY CODE
1	Temporary LV Joint Shell - Large	153012

June 22

ES400 S6

## **Appendix B – Conformance Declaration**

### SECTION-BY-SECTION CONFORMANCE WITH SPECIFICATION

The Tenderer shall declare conformance or otherwise for each product/service or range of products/services, section-by-section, using the following Conformance Declaration Codes.

#### **Conformance Declaration Codes:**

N/A =	Clause is not applicable/appropriate to the product/service.	
C1 =	The product/service conforms fully with the requirements of this clause.	
C2 =	The product/service conforms partially with the requirements of this clause.	
C3 =	The product/service does not conform to the requirements of this clause.	
C4 =	The product/service does not currently conform to the requirements of this clause, but the manufacturer proposes to modify and test the product in order to conform.	

C4 =	proposes to modify and test the product in order to conform.		
Manufacturer:			
Product/Service Description:			
Product/Service Reference:			
Name:			
Company:			
Signature:			

ES400 S6

#### **SECTION-BY-SECTION CONFORMANCE**

Section	Section Topic	Conformance Declaration Code	Remarks * (must be completed if code is not C1)
1	Introduction		
2	Scope		
4.1	Product not to be Changed		
4.2	Electricity North West Technical Approval		
4.3	Quality Assurance		
4.4	Formulation		
4.5	Identification Markings		
4.6	Minimum Life Expectancy		
4.7	Product Conformity		
4.8	Confirmation of Conformance		
5.1	Requirements for Type Tests at the Supplier's Premises		
5.2	Requirement for Routine Tests at the Supplier's Premises		
6.1	Requirements		
6.2	Mechanical Impact Resistance		

<sup>\*</sup> Applicable specifications shall be stated in the Remarks column where alternatives are quoted within a section. The Remarks column shall also be used to indicate cases where the products or services exceed the quoted specifications.