

Fortress Range

Sheet Steel & Stainless Steel Single Door Hinged Pillars




The Fortress range of Sheet Steel pillars is manufactured to a new modular design and is available in 6 sizes and 3 material types.

HDG: Sheet Steel which is Hot Dip Galvanised to BS 1461.

HDP: Sheet Steel which is Hot Dip Galvanised to BS 1461 and then treated and Painted as standard in grey.


STP: 2.5mm Stainless Steel

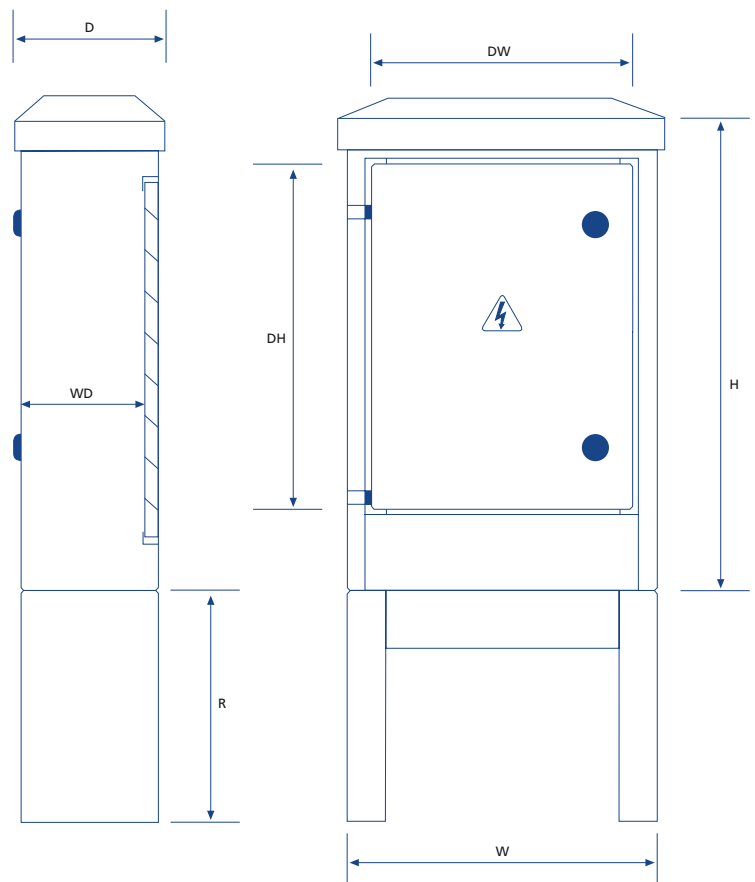

Dimensions (mm)

Pillar size code	5	6	8	9	10	12
Height (H) above ground	791	636	836	1035	1194	1294
Root Section (R)	350	300	300	350	350	350
Width (W)	310	400	600	661	800	1100
Depth (D)	220	180	250	281	350	400
Door Opening Height (DH)	580	415	615	840	915	1015
Door Opening Width (DW)	200	300	500	550	700	1000
Working Depth (WD)	170	155	225	225	325	375
Backboard Size (WxH)	630x300	380x455	580x655	630x880	780x955	1080x1040
Weight (Kg) (3mm thickness)	36	42.5	71.5	84	108	142

The ordering code consists of 4 sections

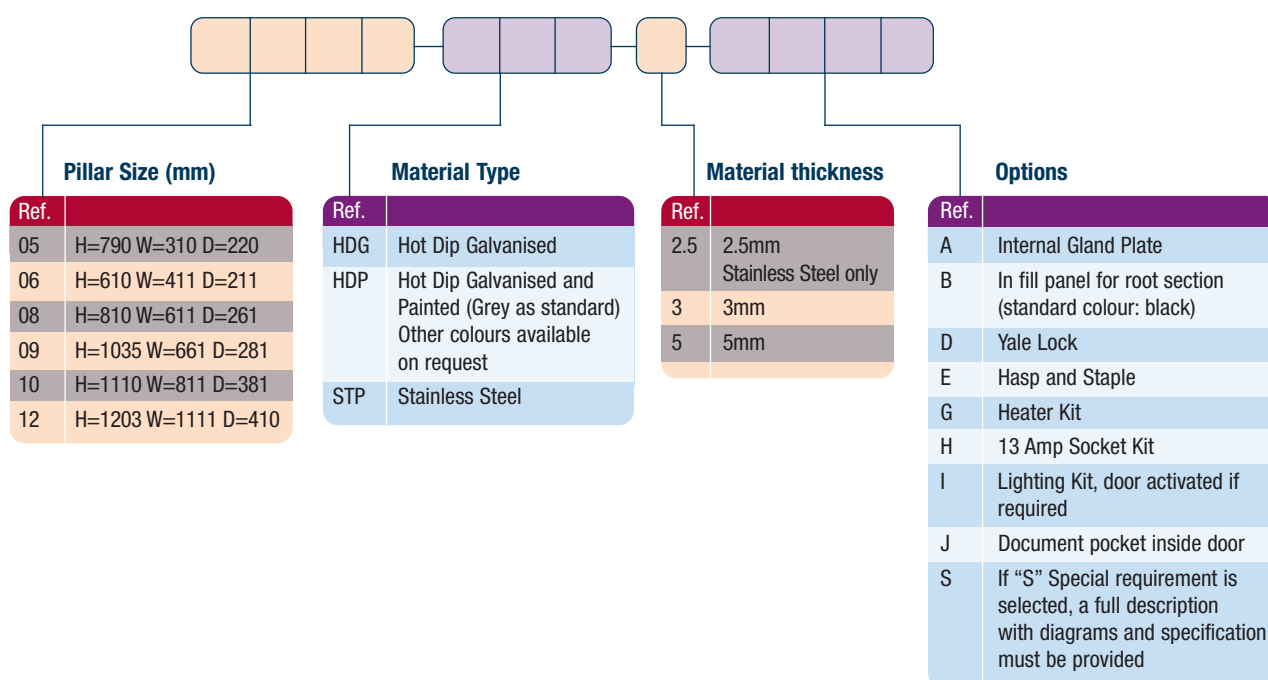

Specification

Long life hinges manufactured from solid stainless steel blocks on all versions

Fitted as standard two Tri-head locks

Backboard made from 18mm thick treated exterior grade plywood

Detachable root section finished in bitumen enriched paint

Danger warning label fitted in a recess in the door

Earth lead connection supplied from pillar body to door

HDP is powder coated grey (BS 4800.18B25) as standard

High quality UV resistant paint to a minimum thickness of 60 microns

Door seal up to IP65

Detachable roof

Backboard can be removed for wiring

Anti vandal lock available
(See Feeder Pillar Accessory page)

Options

Pre-wired

Special labels

G2A Highways paint specification